


Product Data Sheet

2026-07-07

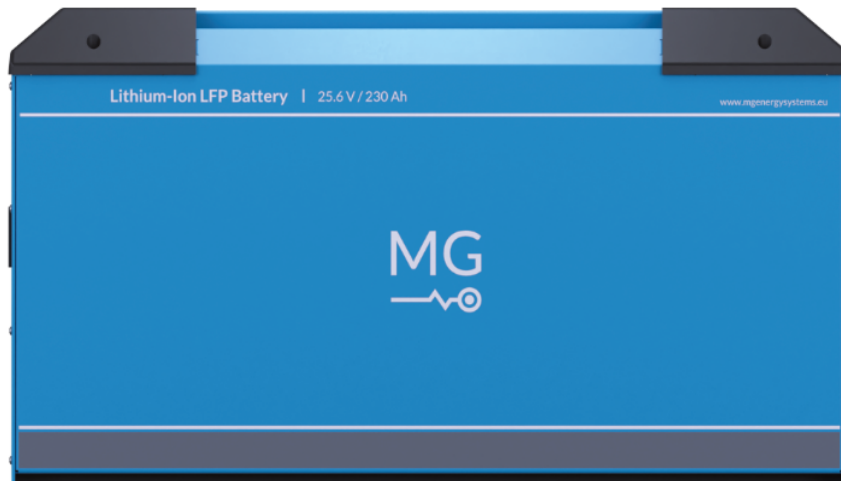

MG LFP Battery 25.6V/230Ah/5800Wh

MGLFP240230

Description

The MG LFP Battery 24 V 230 contains the third generation LiFePO₄ chemistry forms the basis of this safe and reliable battery. This battery is fully scalable in both voltage and capacity. Easily expand your energy storage system (ESS) by connecting the LFP batteries in parallel and series. Connect up to 4 modules in series, to create a battery voltage of 96 Vdc. Adding more parallel strings increases the system capacity. As a result, you can reach system capacities of over 1 MWh.

Product downloads

<https://downloads.mgenergysystems.eu/lfp24v>

Specifications

Charge

Charge Voltage ¹	28.2 V
Continuous Charge Current ²	230 A (1.0 C)
Maximum Charge Current (10 s)	230 A (1.0 C)
Maximum Charge Voltage	29.2 V
Recommended Charge Current	< 115 A (0.5 C)

Configuration

Parallel Configuration	Up to 96 modules
Series Configuration	Up to 4 modules

Discharge

Continuous Discharge Current ²	230 A (1.0 C)
Discharge Cut-Off Voltage	24.0 V
Maximum Discharge Current ²	345 A (1.5 C)
Recommended Discharge Current	< 115 A (0.5 C)

Environmental

Humidity (Non-Condensing)	≤ 95 %
Operating Temperature Charge	0 to +45 °C
Operating Temperature Discharge	-20 to +55 °C
Recommended Operating Temperature	+20 to +30 °C
Recommended Storage Temperature	+10 to +35 °C

Mechanical

Cooling	Air, Convection
Data Connection	CAN Bus RJ45
Enclosure Material	Metal
Height	294 mm
IP-Protection Class	IP30
Length	517 mm
Power Connection	M8 Cable lug (20 Nm)
Weight	41 kg
Width	193 mm

Safety

Balancing	Passive
Battery Management System (BMS)	Integrated Slave BMS
Compatible BMS Master Controller	MG Master HV 300 MG Master HV 500 MG Master HV 500 G2 MG Master LV 24-48 V MG Master LV 72-96 V
Fuses ³	300 A, Fuse inside

Standards

Approvals	IEC-EN62619 (ES-TRIN) IEC-EN62620 (ES-TRIN)
EMC: Emission	EN-IEC 61000-6-3:2007/A1:2011/C11:2012
EMC: Immunity	EN-IEC 61000-6-1:2007
Low Voltage Directive	EN 60335-1:2012/AC:2014

Technical Specifications

Cell Configuration	8S1P
Cycle Life DOD 80% ⁴	> 3500
Nominal Capacity	230 Ah
Nominal Energy	5.8 kWh
Nominal Voltage	25.6 V
Specific Energy ⁵	143 Wh/kg
System Voltage	24 V 48 V 72 V 96 V
Technology	LiFePO4

Footnotes

- ¹ This is the recommended charge voltage at 25 °C.
- ² Duration is depending on battery temperature.
- ³ Fuses can be replaced with non-fused battery poles for high power applications. In this case each battery string needs to be fused elsewhere in the circuit.
- ⁴ End-of-Life is 70% of initial capacity at 25 °C. Cycle life is depending on the battery temperature.
- ⁵ Higher battery temperature will result in lower number of cycles.
- ⁵ Including BMS and enclosure.

The specifications provided are for informational purposes only and are subject to change without notice. While every effort has been made to ensure the accuracy and completeness of the specifications, MG Energy Systems assumes no responsibility for any errors or omissions.



Logistics

HS code	8507600090
Country of origin	Netherlands
Shipping weight	42.5 kg
Classified as dangerous goods	Yes